

# Helical Gear Reducers

---

# Features

H-series gear units have been designed to be highly **reliable** even under heavy working conditions, and are particularly suited for applications involving **high radial loads**. The H-series includes a **large number** of extremely **versatile** models, available in cast iron from size 030 to size 140 and in aluminium from size A30 to size A60.



**H - PH**  
Fitted for motor coupling -  
Coupling with flexible  
coupling



**CH**  
With compact motor



**IH**  
With input shaft

## CAST IRON

### Sizes:

**030-040-050-060-080-100-125-140**

- Casing with feet, flange F or universal U
- Gearing with 1, 2 and 3 reduction stages
- Gears hardened and tempered with shaved or ground profile
- Cases in G200 grey cast iron for high strength and optimized with FEM analysis
- Excellent mechanical strength, particularly suitable to support high axial loads and high reliability
- Load capacity calculated to ISO6336 and verified according to AGMA 2001
- Painted with RAL 5010 blue epoxy-polyester powder according to DIN 1843
- ATEX versions available 2GD/3GD
- Accessories: output flange, backstop device, reinforced output



**HA**  
Fitted for motor coupling



**CHA**  
With compact motor



**IHA**  
With input shaft

## ALUMINIUM

### Sizes:

**A30-A40-A50-A60**

- Casing with feet, flange F or universal U
- Gearing with 1, 2 and 3 reduction stages
- Gears hardened and tempered with shaved or ground profile
- Cases in die-cast aluminium alloy
- Excellent mechanical strength while being and particularly lightweight
- Load capacity calculated to ISO6336 and verified according to AGMA 2001
- Painted with RAL 5010 blue epoxy-polyester powder according to DIN 1843
- ATEX versions available 3GD

# Cast Iron Versions



---

## H... Single Stage

---

Foot mounting




---

## H...F Single Stage

---

Flange mounting



---

## H...M Single Stage

---

Foot mounting with low output shaft centre



---

## H...U Single Stage

---

Foot/flange mounting



---

## H... 2/3 Stages

---

Foot mounting



---

## H...F 2/3 Stages

---

Flange mounting



---

## H...U 2/3 Stages

---

Foot/flange mounting




# Aluminium Versions



## HA.. Single Stage

Foot mounting



## HA..F Single Stage

Flange mounting



## HA.. 2 Stages

Foot mounting



## HA.. 3 Stages

Foot mounting



## HA..F 2 Stages

Flange mounting



## HA..F 3 Stages

Flange mounting




## HA..U 2/3 Stages

Foot/flange mounting



# Range

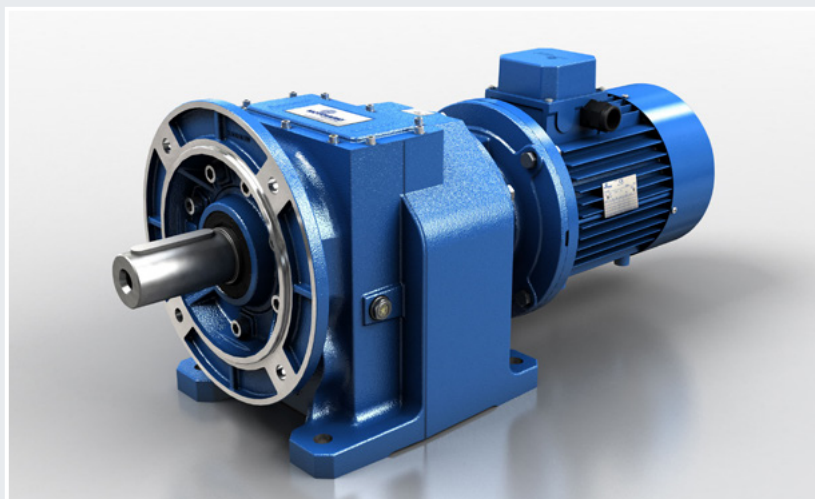

	*Ø [mm]	Output Torque $M_2$ [Nm]	Ratio(i)	
		Max	Min	Max
H030	25	200	4,70	245,70
H040	19-30	300	1,44	282,10
H050	24-35	500	1,27	267,65
H060	28-35-40	850	1,34	268,00
H080	38-40-50	1.800	1,30	222,78
H100	48-60	3.600	1,29	242,59
H125	55-70	5.000	1,23	230,92
H140	90	8.000	5,27	206,08

- Power from 0,12 kW up to 45 kw
- Reduction ratios between 1,23 and 282,10
- Torque max 8.000 Nm
- Admissible radial loads max 55.000 N



	*Ø [mm]	Output Torque $M_2$ [Nm]	Ratio (i)	
		Max	Min	Max
HA30	11-14-16-19-19,7-20	100	5,38	347,29
HA40	16-19-20-22-24-25-28	150	1,45	347,29
HA50	24-25-28-30-32-35	300	1,45	353,98
HA60	24-28-30-35-40	480	1,33	353,98

- Power from 0,12 kW up to 4.8 kw
- Reduction ratios between 1,33 e 353,98
- Torque max 480 Nm
- Admissible radial loads max 8.000 N

# WORLDWIDE

DP-HEN/2015/REV.0



## Subsidiaries

**Germany**

**France**

**Spain**

**United Kingdom**

**Denmark**

**USA**

**China**

**India**



**Italy**

**Australia**

**Benelux**

**Bulgaria**

**China**

**Finland**

**France**

**India**

**Ireland**

**Israel**

**Lithuania**

**Malaysia**

**Netherlands**

**Poland**

**Portugal**

**South Korea**

**Spain**

**Sweden**

**Thailand**

**Turkey**

**United Kingdom**

**Ukraine**

**USA**

[www.motovario.com](http://www.motovario.com)

